



## 모델명 : LM-4040-4.0-15.2

### 1. PART NUMBERING SCHEME

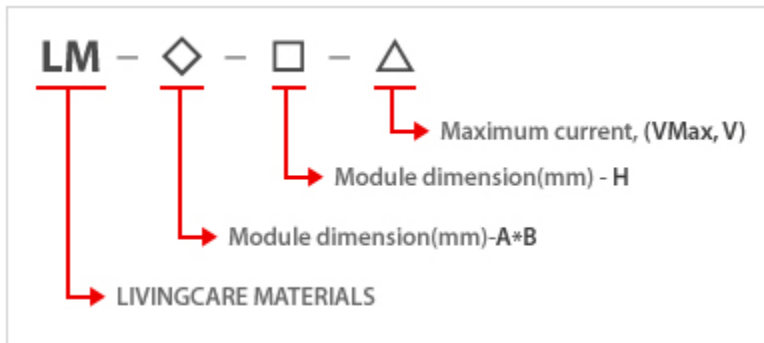

### 2. GENERAL SPECIFICATION

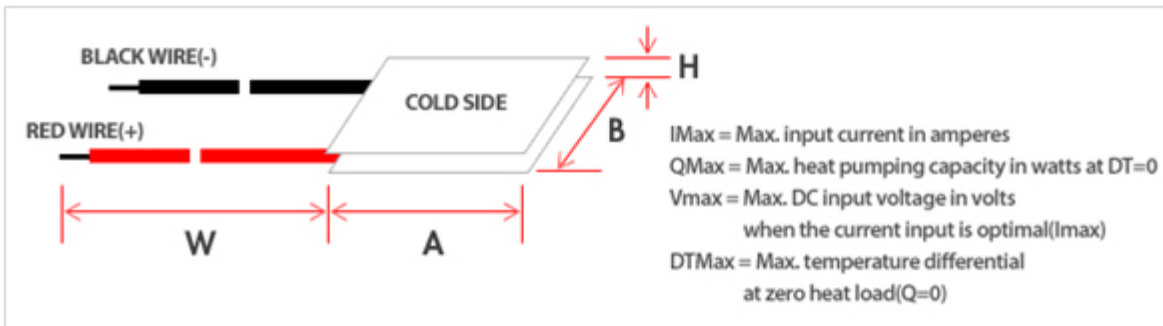

MODEL	$I_{MAX}(A)$	$Q_{MAX}(W)$	$V_{MAX}(V)$	$\Delta T_{MAX}(^{\circ}C)$	DIMENSION		
	Th=27°C				A	B	H
LM-4040-4.0-15.2	5.6	52.9	15.2	70	40±0.5	40±0.5	4.0±0.05
	Th=50°C						
	6.0	59.5	15.2	79			

\*All specifications are subject to change without notice.



**리빙케어소재기술(주)**

Livingcare Development of Materials  
www.lcdm.co.kr

경기도 군포시 고산로 166 당정동 (103-1001)

SK 벤티움 103동 1001호

TEL : 031-436-0190 FAX : 031-436-0198

EMAIL : livingcare@lcdm.co.kr

SPEC.	Unit	Value
INTERNAL RESISTANCE	Ω	2.1±10% (at 25°C)
UNFLATNESS AND NONPARALLED NOT MORE THAN	mm	0.05
MELTING POINT TEMPERATURE OF INTERNAL SOLDER	°C	220
CERAMIC TYPE		Al <sub>2</sub> O <sub>3</sub> 96%

3. PERFORMANCE GRAPH

