



모델명 : LM-2020-4.0-3.7

(舊 모델명 LCDM1L-1.4-031-6.0-2020)

PART NUMBERING SCHEME

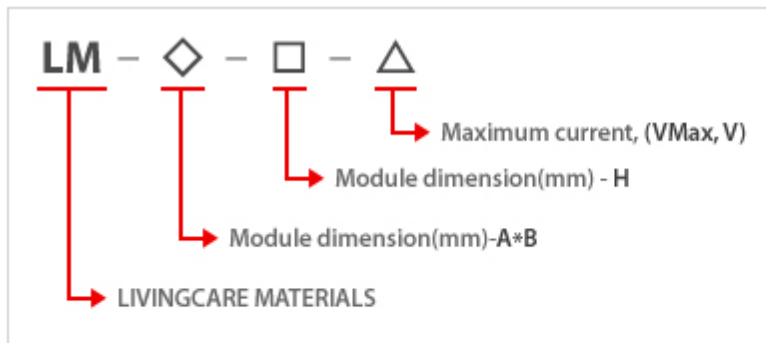

GENERAL SPECIFICATION

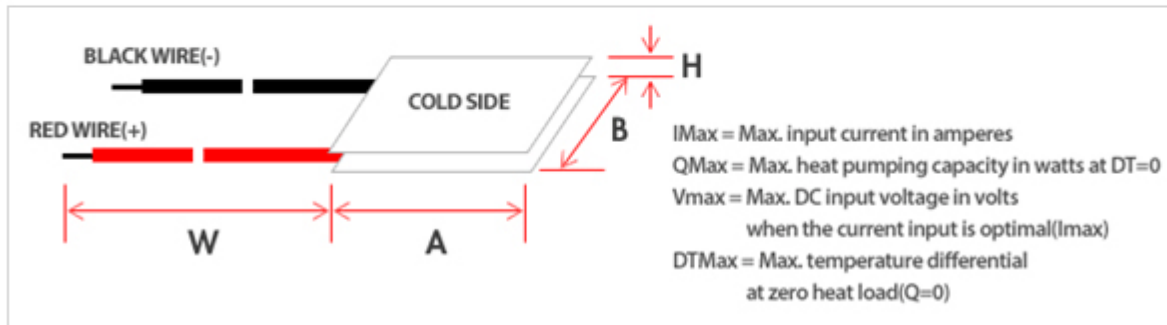

MODEL	$I_{MAX}(A)$	$Q_{MAX}(W)$	$V_{MAX}(V)$	$\Delta T_{MAX}(^{\circ}C)$	DIMENSION		
	$T_h=27^{\circ}C$				A	B	H
LM-2020-4.0-3.7	5.6	12.9	3.7	70	20±0.5	20±0.5	4.0±0.05
	$T_h=50^{\circ}C$						
	6.0	14.5	3.7	79			

*All specifications are subject to change without notice.



리빙케어소재기술(주)

Livingcare Development of Materials
www.lcdm.co.kr

경기도 군포시 당정동 522 번지

SK 벤티움 103동 1001호

TEL : 031-436-0190 FAX : 031-436-0198

EMAIL : livingcare@lcdm.co.kr

SPEC.	Unit	Value
INTERNAL RESISTANCE	Ω	0.55±10% (at 25°C)
UNFLATNESS AND NONPARALLED NOT MORE THAN	mm	0.05
MELTING POINT TEMPERATURE OF INTERNAL SOLDER	°C	220
CERAMIC TYPE		Al ₂ O ₃ 96%
Lead wire		Silicone rubber insulated wire (-60~180°C)

3. PERFORMANCE GRAPH

