



**모델명 : LM-3030-3.7-15.2**

**1. PART NUMBERING SCHEME**

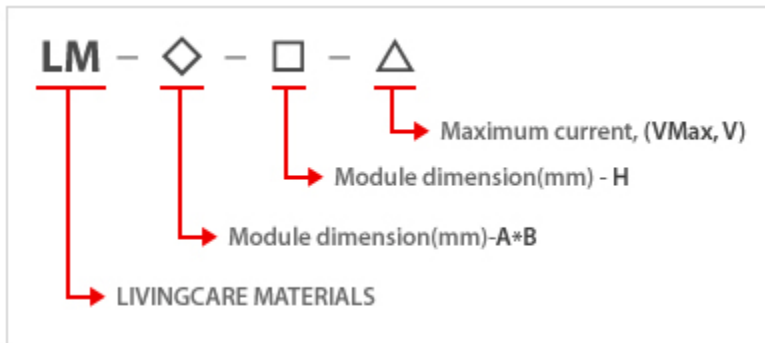

**2. GENERAL SPECIFICATION**

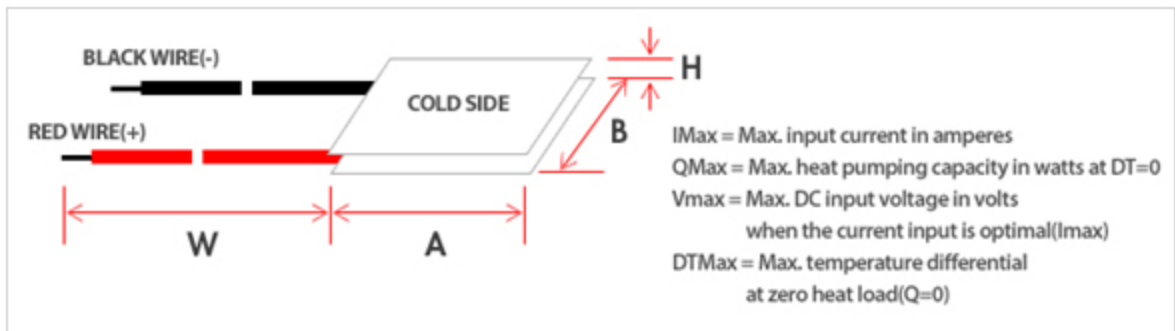

MODEL	IMAX(A)	QMAX(W)	VMAX(V)	ΔTMAX(°C)	DIMENSION		
					A	B	H
LM-3030-3.7-15.2	Th=27°C				30±0.5	30±0.5	3.7±0.05
	3.5	33.2	15.2	70			
	Th=50°C						
	3.8	37.4	15.2	79			

\*All specifications are subject to change without notice.

SPEC.	Unit	Value
INTERNAL RESISTANCE	Ω	3.6±10% (at 25℃)
UNFLATNESS AND NONPARALLED NOT MORE THAN	mm	0.05
MELTING POINT TEMPERATURE OF INTERNAL SOLDER	℃	220
CERAMIC TYPE		Al <sub>2</sub> O <sub>3</sub> 96%
Lead wire		Silicone rubber insulated wire (-60~180℃)

3. PERFORMANCE GRAPH

