



**모델명 : LM-1515-3.7-3.7**

**PART NUMBERING SCHEME**

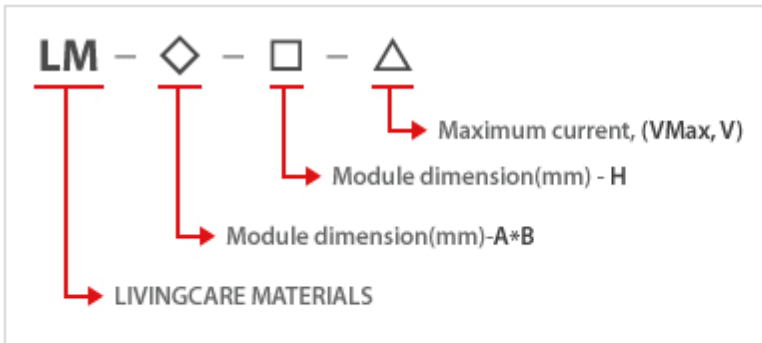

**GENERAL SPECIFICATION**

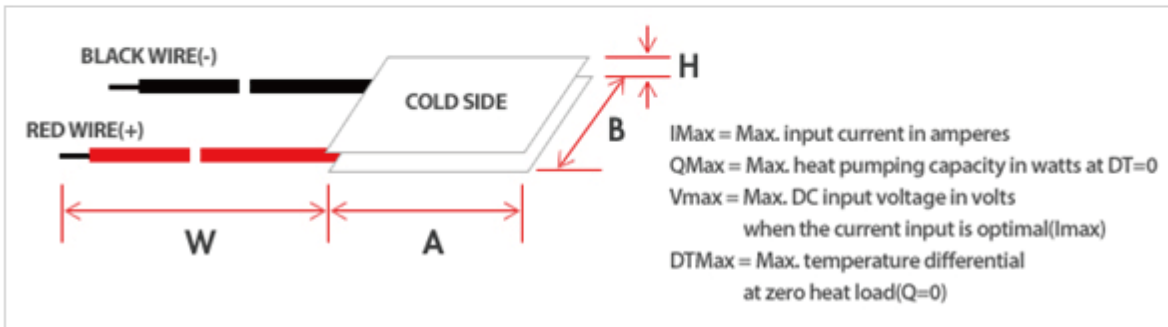

MODEL	IMAX(A)	QMAX(W)	VMAX(V)	$\Delta$ TMAX(°C)	DIMENSION		
	Th=27°C				A	B	H
LM-1515-3.7-3.7	3.5	8.1	3.7	70	15±0.5	15±0.5	3.7±0.05

\*All specifications are subject to change without notice.

SPEC.	Unit	Value
INTERNAL RESISTANCE	Ω	0.8±10%
UNFLATNESS AND NONPARALLED NOT MORE THAN	mm	0.05
MELTING POINT TEMPERATURE OF INTERNAL SOLDER	℃	220
CERAMIC TYPE		Al <sub>2</sub> O <sub>3</sub> 96%
Lead wire		Silicone rubber insulated wire (-60~180℃)

3. PERFORMANCE GRAPH

