



모델명 : LM-2020-4.0-3.7

PART NUMBERING SCHEME

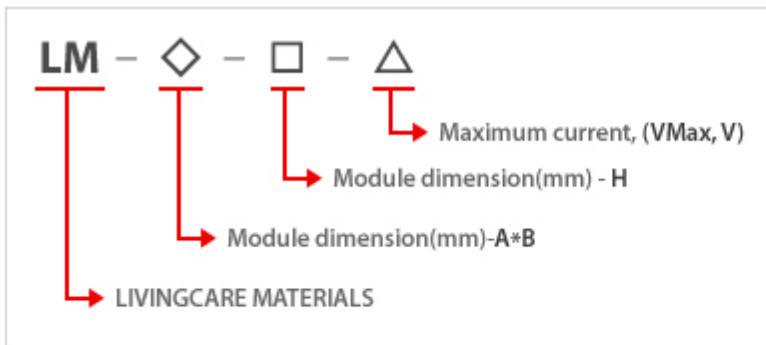

GENERAL SPECIFICATION

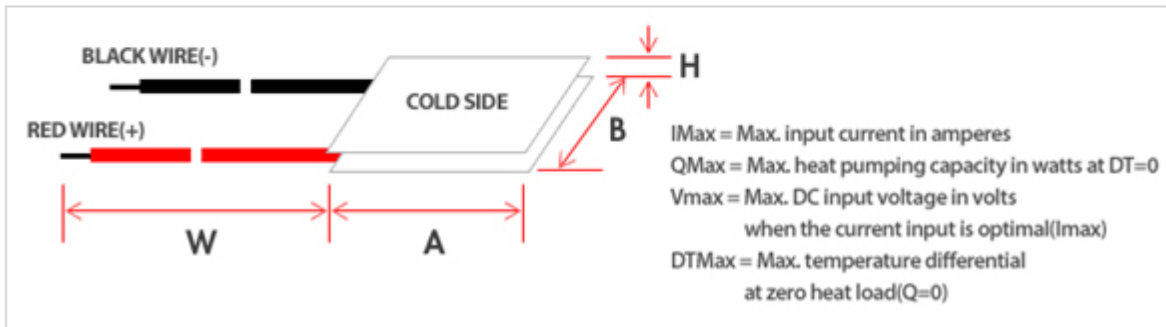

MODEL	I _{MAX} (A)	Q _{MAX} (W)	V _{MAX} (V)	ΔT _{MAX} (°C)	DIMENSION		
	Th=27°C				A	B	H
LM-2020-4.0-3.7	5.6	12.9	3.7	70	20±0.5	20±0.5	4.0±0.05
	Th=50°C						
	6.0	14.5	3.7	79			

*All specifications are subject to change without notice.

SPEC.	Unit	Value
INTERNAL RESISTANCE	Ω	0.55±10% (at 25°C)
UNFLATNESS AND NONPARALLED NOT MORE THAN	mm	0.05
MELTING POINT TEMPERATURE OF INTERNAL SOLDER	°C	220
CERAMIC TYPE		Al ₂ O ₃ 96%
Lead wire		Silicone rubber insulated wire (-60~180°C)

3. PERFORMANCE GRAPH

